

SPEEDIO

W1000Xd1

Wide Travel Compact Machining Center



Cutting Out the Waste

Times are changing. Are you ready?
 You need a machine that's fast and compact.
 With the ability to make any cut.
 In this world, only the strong survive.

Make it better with **SPEEDIO**.

SPEEDIO



* The photo shows the machine with 150 mm high column specifications.

Provides better solutions that eliminate all possible waste, utilizing unparalleled wide travels and maximized high-speed control

In response to customers' expectations of "machining larger workpieces with #30 machine," 500 mm travel Y-axis has been achieved despite the compact body, breaking common conceptions of #30 machines.


- | | |
|------------------------------|---|
| 1. NC operability | Equipped with a new usability-oriented "CNC-D00 controller" |
| 2. Machining area | Wide machining area to accommodate a variety of machining, such as large workpiece machining and multi-part machining. |
| 3. Productivity | Further improves productivity with optimal operation control achieved through machine/controller integrated development |
| 4. Machining capability | Demonstrates a broad range of machining capabilities, from high-speed, highly efficient machining to heavy-duty machining |
| 5. Environmental performance | Creates an earth-friendly plant environment by greatly reducing power consumption |

Basic specifications	
Max. spindle speed (min ⁻¹)	10,000 Optional: 10,000 high-torque, 16,000
Travels (mm)	X1,000 Y500 Z300
Tool storage capacity (pcs.)	14/21
Rapid traverse rate (m/min)	X/Y/Z 50/50/56
Required floor space (mm)	2,410 x 2,443
BT dual contact spindle	Optional
Coolant Through Spindle	Optional

Expands target machining parts and process flexibility utilizing the widest machining area in #30 machines' history

The large machining area can respond to customers' expectations in a variety of situations, while maintaining high-speed and easy-to-handle features of #30 machining centers.

This new machine enables workpiece machining previously considered impossible in various industries, including the automobile industry.

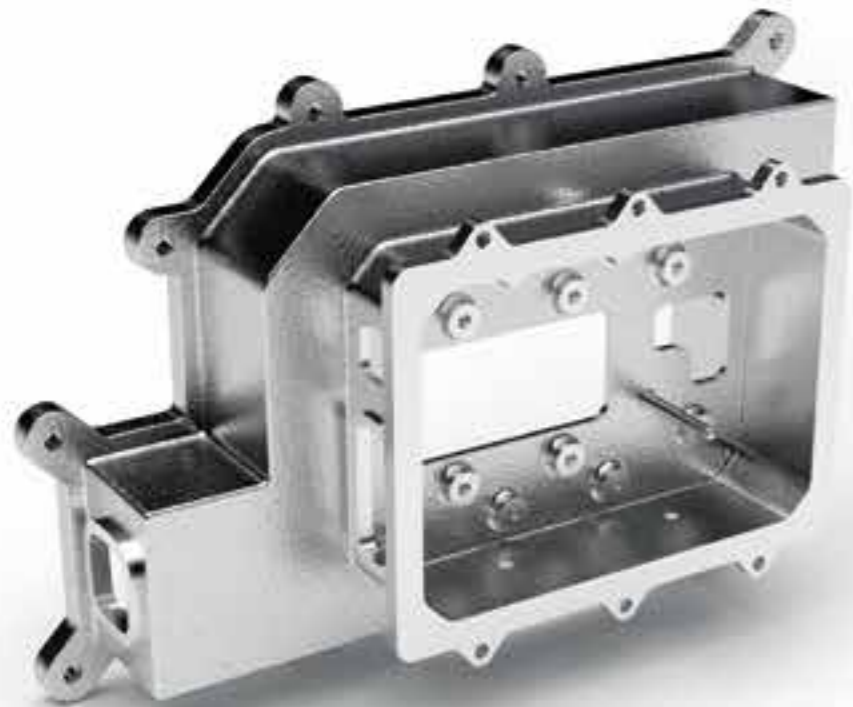

Inverter case
Size: 400 x 280 x 150



Timing chain cover
Size: 450 x 330 x 80



Oil pan
Size: 380 x 280 x 90



Cylinder head cover
Size: 830 x 250 x 135



20-inch wheel
Size: ϕ 550 x 230



Battery case
Size: 720 x 350 x 105



Transmission case
Size: 550 x 300 x 280



Bike frame
Size: 820 x 450 x 160

Equipped with new “CNC-D00 controller” Enhanced usability with 15-inch LCD touch panel

Intuitive operation is possible with new support apps and vertical touch panel screen.
Relevant functions are grouped according to purpose, such as setup and machining, leading to efficient operation.
Production and operation states are visualized, allowing faster understanding.
The new NC controller further improves work efficiency in pursuit of higher productivity.

Home screen

Created a new home screen that serves as the start point of all operations.
Useful information like workpiece counter and tool life are displayed during mass production. New support app screens or conventional screens are opened from here.



Support apps


Created new support apps with improved operability and visibility, such as an ATC tool app that enables all tool settings to be performed on one screen and a production result app that visualizes production results and operation state.



ATC tool app

Machining support

Equipped with functions to reduce the cycle time, such as a machining load waveform display/saving function and an app that enables operators to adjust parameters easily according to machining details.

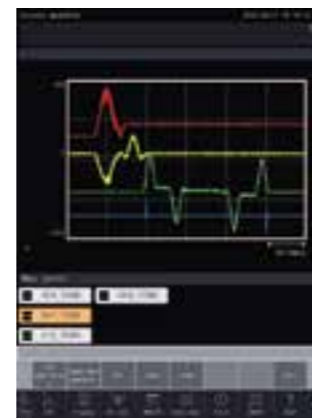


Waveform display app

Network function compatible with peripheral equipment/automation

Standard equipped with a PLC function. Increased program memory and object memory enhance peripheral device operation.
Large volumes of program data can be transferred at high speed via Ethernet.
The production result app screen can be viewed from the PC's browser.



PLC app

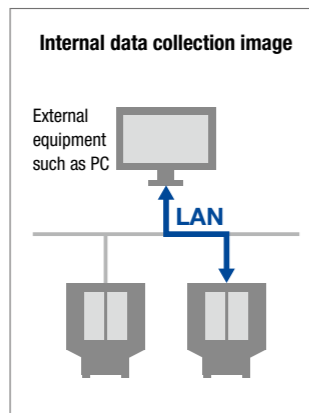

Maintenance functions

Equipped with functions to improve the operating rate, such as tool monitoring, maintenance time notice, details display when an alarm occurs, and guidance for recovery/check work.



Recovery support app

Accessories

Equipped with handy tools to support smooth operation, such as a calculator where results can be copied/pasted, memo pad you can write in directly on the screen, and file viewer you can use to refer to pdf files.



Calculator




Achieved unprecedented large machining area to accommodate a variety of machining from small to large workpieces


The wide machining area can accommodate constantly varying onsite needs, such as large workpiece machining, long-hour multi-part machining of small parts, multi-product small-volume production with various jigs placed side by side, which enhances the plantwide flexibility.

Ample travels and table size

Ample X/Y-axes travels and sufficient loading capacity allow machining large workpieces and mounting a large jig, not available on conventional #30 machines.

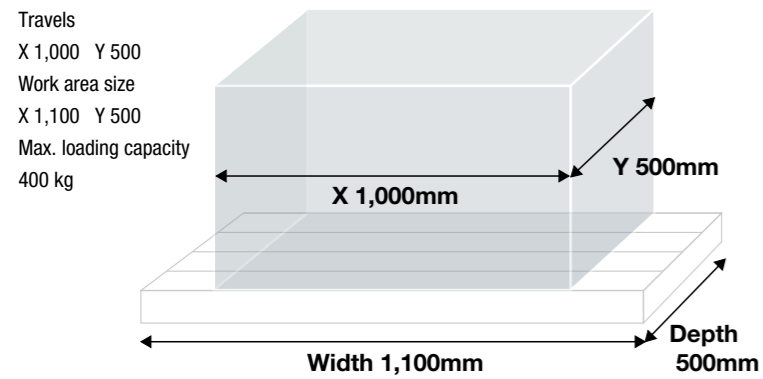

A trunnion jig with a turning diameter of 540 mm can be mounted. (High column 250 mm)

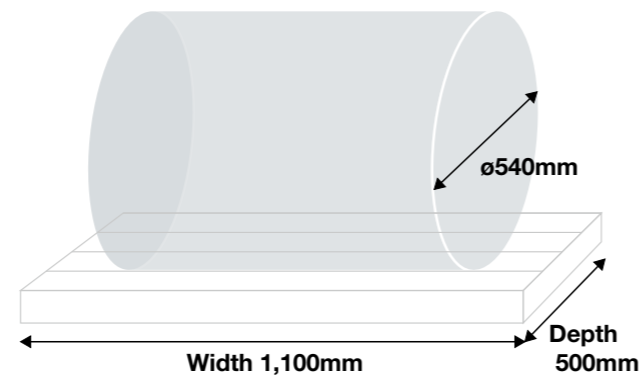

Flexibly applicable to various types of machining

Making use of the width and depth of the broad jig area, jigs and workpieces can now be placed freely, enabling more flexible and efficient machining in various processes.

Large workpiece machining




Multi-part machining



Rotary table and flat jig




Parallel arrangement of vises

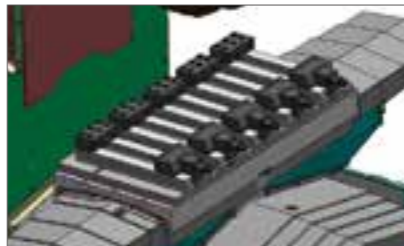


Improved workability

Linked double doors are used. The wide opening and highly accessible table improve workability.

Door opening dimension: 1,140 mm



From front to table: 226 mm



Demonstrates high productivity utilizing lightweight and low inertia features of #30 machines and original NC controller


High speed, high acceleration, and high responsiveness have been the aim of machine/controller integrated development, and any wasted motion and time has been thoroughly eliminated to drive machine performance to the fullest and achieve high productivity.

Productivity improvement


Productivity has been further improved by optimally controlling operation with the new CNC-D00 controller and using a low inertia motor.

Improved by 3% or more (compared to previous model)

Program mainly consisting of drilling and tapping



Program mainly consisting of milling and end milling



* Data taken running machining program created by Brother

Non-stop ATC


Tool change time has been reduced by increasing the speed of spindle start/stop, Z-axis up/down, and magazine operation.

Operation	General M/C	W1000Xd1
Chip-Chip	1.4s	1.2s
Tool-Tool	0.8s	0.6s




Simultaneous operation control

Reduction in non-cutting time has been achieved by simultaneously performing tool change and positioning X/Y and additional axes.

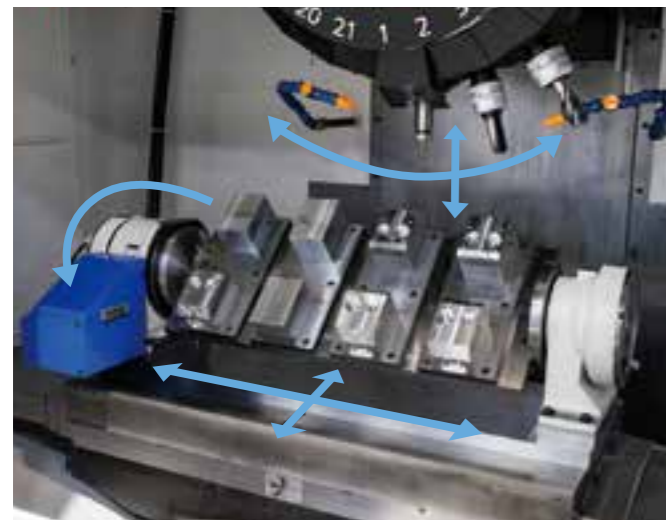

Rotary table T-200Ad (optional)

Contributes to further improve productivity in multi-face machining. Use of the roller gear cam mechanism achieves high productivity, high accuracy, and extended service life.

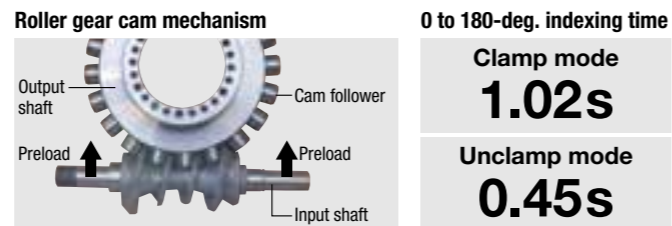

Provides broad cutting performance from high-speed and highly efficient machining to heavy-duty machining

High rigidity based on a special design and use of a high-torque spindle motor achieve stable machining while demonstrating high machining capability.

Max. tool weight 4 kg

Increased the weight of tools that can be mounted. Combined with wide travels (X 1,000 mm, Y 500 mm), the machine is suitable for a wider variety of applications than ever.

* Changing parameter settings is required. (Tool indexing time is changed.)

Compatible with 7 MPa high-pressure CTS (optional)

The machine is compatible with 7 MPa high-pressure CTS in addition to 1.5 MPa CTS. Demonstrates its abilities in high-speed drilling or peck drilling.

* CTS: Coolant Through Spindle




ø6 × 170mm (L/D=28)
Workpiece: Carbon steel

High-power spindle motor

A spindle motor with high torque in the medium- and high-speed range is used to achieve high-speed and highly efficient machining. The machine with high-torque spec. (optional) greatly improves the torque in the low-speed range, and demonstrates its abilities in heavy-duty steel machining.

Motor torque characteristics

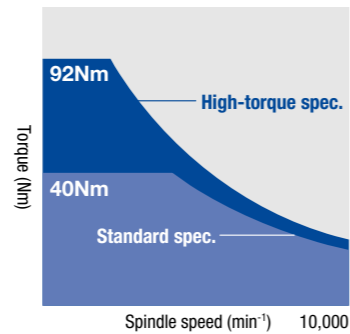


Spindle motor torque values

High-torque spec. (optional)	
Max. torque	92Nm
Max. output	26.2kW
Standard spec.	
Max. torque	40Nm
Max. output	18.9kW

Highly rigid structure

Structural parts, such as the base, column, and table, have been specially designed through CAE analysis to secure high rigidity.

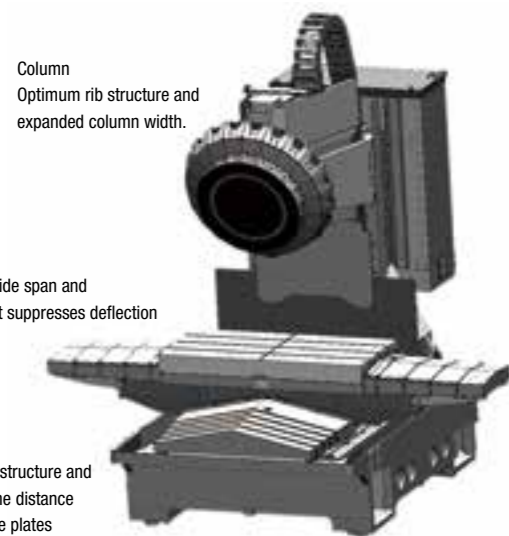

Column
Optimum rib structure and expanded column width.

Table
Expanded guide span and structure that suppresses deflection

Base
Optimum rib structure and increase in the distance between base plates

Machining examples

End milling (groove)

Cutting amount: 430 cc / Workpiece: Carbon steel
ø16 end mill * High-torque spec.



Large hole machining

Hole size: ø50 mm / Workpiece: Carbon steel
Throw-away drill * High-torque spec.



Facing

Depth of cut: ap 3 mm / Workpiece: Carbon steel
ø80 face mill * High-torque spec.



Taper tapping

Tapered tap for tubes: PT 1/2
Workpiece: Stainless steel * High-torque spec.



Machining capability

	ADC	Cast iron	Carbon steel
Drilling	10,000min ⁻¹	D32 × 0.2 (1.26 × 0.008)	D28 × 0.15 (1.1 × 0.006)
	10,000min ⁻¹ high-torque	D40 × 0.2 (1.57 × 0.008) D30 × 0.7 (1.18 × 0.03)	D34 × 0.15 (1.34 × 0.006) D26 × 0.4 (1.02 × 0.02)
	16,000min ⁻¹	D24 × 0.2 (0.94 × 0.008)	D22 × 0.15 (0.87 × 0.006)
Tapping	10,000min ⁻¹	M27 × 3.0 (1-8UNC)	M24 × 3.0 (7/8-9UNC)
	10,000min ⁻¹ high-torque	M39 × 4.0 (1 1/2-6UNC)	M33 × 3.5 (1 1/4-7UNC)
	16,000min ⁻¹	M22 × 2.5 (7/8-9UNC)	M18 × 2.5 (5/8-11UNC)
Facing	10,000min ⁻¹	960 (58.6)	137 (8.4)
	10,000min ⁻¹ high-torque	1,700 (102.4)	255 (15.5)
	16,000min ⁻¹	660 (40.3)	73 (4.5)

* Data obtained from tests conducted by Brother.

Reliability maintains high productivity


Earth-friendly machine

Reliability functions that prevent defective products and maintenance functions that prevent machine failure achieve high reliability and maintain high productivity. Our efforts to improve environmental performance and effects of high productivity greatly reduce power consumption, making the machine earth-friendly.

High reliability – Improved chip control

Clean coolant is returned to a clean tank through a tank with a cyclone filter that removes fine chips. This reduces the filter change frequency and extends the service life of the pump.


Tank with cyclone filter (special option for CTS)

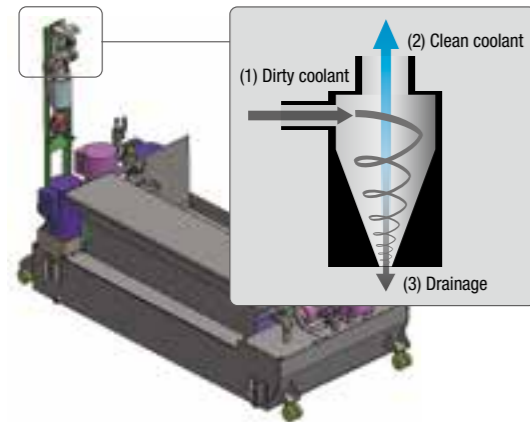

High environmental performance

In addition to the low inertia spindle and highly efficient spindle motor, various energy/air saving technologies are utilized to achieve low power consumption. The amount of power consumption can be viewed on the monitor.

Power consumption for one cycle



* Data taken running machining program created by Brother


Energy-saving technologies

Low inertia spindle, highly efficient spindle motor, power regeneration system, energy-saving pump, energy-saving NC functions

Air-saving technologies

Optimized spindle air blow timing, extremely airtight air purge structure

Power consumption app



Reliability/maintenance functions that prevent defective products and machine failure, and assist quick recovery

To maintain productivity at plants, the machine is equipped with many functions that can prevent possible defects in daily production sites, such as tool abrasion, omission of tool attachment, and re-machining of the same workpiece, and that assist with recovery in the case of machine failure or other problems.

ATC tool monitoring

The presence of a spindle tool is detected before and after tool change without using a sensor.



Machining load monitoring

Machining load applied to the spindle is monitored to issue an alarm when the load is not within the preset range.



Maintenance notice

Notifies operators of maintenance related issues in advance, such as greasing time.



Alarm log

Displays alarm log details to help identify the cause.



High reliability – Measure for chips

Chip evacuation performance has been improved to satisfy the wide machining area. Two chip shower pumps are installed to double the flow rate.

Roof-shape telescopic cover

Roof-shape telescopic covers are used for the X/Y-axes to prevent chips from building up.




Tool washing, air assisted type (optional)

Discharge pressure and flow rate have been increased to steadily remove chips attached to the holder.



Image of chip evacuation flow






Coolant tank
A large 200L tank is available.



Coolant Through Spindle (CTS)
Can be selected from 1.5 MPa or 7 MPa. Particularly effective in non-step peck drilling.



Column coolant nozzle
Powerfully removes chips on and around the workpiece to prevent chips building up.



Head coolant nozzle
Coolant can reliably be applied to the machining section as the tool and nozzles are set in place.



Signal light, 1, 2, or 3 lamps
LED lamps are used. No maintenance required. Can be tilted to improve visibility.



Automatic oil lubricator
Regularly applies oil to all lubricating points on the tree axes.



Automatic grease lubricator
Regularly applies grease to all lubricating points on the three axes. *Manual greasing is required for the standard specification model.



Automatic door with switch panel 10 holes
A motor-driven door is used, achieving smooth operation.



Chip shower
Chip shower pipes are located at the upper section inside the machine for more efficient flow, and flexible shower nozzles can be directed to the side of the machine cover or sections where chips tend to accumulate.




Tool washing, air-assisted type
High discharge pressure and flow rate efficiently remove chips attached to the holder. Equipped with a filter clog warning function.



Fixture shower valve unit
Consists of jig washing valves and pipes to the ceiling of the machine. Pipes from the machine to the required location must be prepared by customers.



Cleaning gun
Helps clean the workpiece or chips inside the machine after machining.



Area sensor
Optical area sensors are used. Attach area sensors to prevent operators being caught in the automatic door.




Manual pulse generator with enable switch
A cable is provided for the manual pulse generator, making setup easier. * Emergency stop with enable switch




Rotary table T-200Ad
Reduction in the body width secures a wider jig area. Use of the roller gear cam mechanism achieves high productivity, high accuracy, and extended service life.



Tool breakage detector, touch type
A touch switch type tool breakage detector is available.



High column 150mm, 250mm, or 350mm
150mm, 250mm and 350mm high columns are available to meet customer's needs.



Top cover
Shutting the opening on the top prevents coolant or chips splashing outside of the machine. A hole for the mist collector is provided.



Side cover with transparent window, single side
External light is drawn in to make the inside of the machine brighter and improve visibility.



Work light (right side, left side)
LED lamps are used to extend lamp life and save energy.



Spindle override
Spindle speed can be changed without changing the program.



Switch panel 8 or 10 holes
Various switches, such as automatic door open/close switches, are set in specific locations. The switch panel (8 holes) is also available so that the position of the manual pulse connector can be changed.



Master on circuit
Master on circuit and switch can be attached. * A switch panel (8 holes, 10 holes) is required separately.



RS232C 25pin connector
RS232C 25pin connector can be attached to the side of the control box.

- Coolant tank
 - 1) Coolant tank 200L
 - 2) Coolant tank 200L for CTS 1.5MPa with cyclone filter
- Coolant Through Spindle (CTS) 1.5MPa
- Coolant Through Spindle (CTS) 7MPa
- Column coolant nozzle
- Head coolant nozzle
- Chip shower
- Tool washing, air-assisted type
- Fixture shower valve unit
- Cleaning gun
- Mesh basket for collecting chips
- High column, 150mm, 250mm, or 350mm

- Top cover
- Side cover with transparent window, single side
- Work light, 1 lamp for right side
- Work light, 1 lamp for left side
- Signal light, 1, 2, or 3 lamps
- Automatic oil lubricator
- Automatic grease lubricator
- Automatic door with switch panel 10 holes
- Area sensor
- Manual pulse generator with enable switch
- Connector and hook, for manual pulse generator with enable switch
- Rotary table T-200Ad

- Tool breakage detector, touch type
- Additional axis cable for 1 axis or 2 axes
- Spindle override
- Switch panel 8 or 10 holes
- Grip cover for 14/21 tools magazine
- Data protection switch, key type
- Master on circuit
- RS232C 25pin connector at control box
- 100V outlet in control box
- Power supply expansion 50A
- Parts name sticker set
- Specified color
- Transformer box
- Origin alignment mark

- EXIO board assembly
 - EXIO board, input32/output32, additional #1
 - EXIO board, input32/output32, additional #2
- PLC programming software for D00 / C00 / B00 on Windows® 8.1 and 10
- Industrial network
 - 1) CC-Link, master station
 - 2) CC-Link, remote device station
 - 3) PROFIBUS DP, slave
 - 4) DeviceNet, slave
 - 5) PROFINET, slave
 - 6) EtherNet/IP, slave
- Memory expansion 3Gbytes

- Please read the instruction manuals and safety manuals before using Brother products for your own safety. When using oil-based coolant oil or when machining the materials which can cause a fire (ex. Magnesium, resin material), customers are requested to take thoroughgoing safety measures against fire. Depending on the types of cutting material, cutting tools, coolant oil, lubrication oil, it may have an influence on the machine lifecycle. Further questions, please contact our sales representative in charge.

- Leave 700 mm between machines as a maintenance space.

- When exporting our machine together with additional 1-axis rotary table or compound rotary table (including case that a rotary table is scheduled to be installed overseas), the machine is deemed to be included in the "applicable listed items" controlled by the Foreign Exchange and Foreign Trade Law of Japan. When exporting the machine, please obtain required permissions, including an export license, from the Ministry of Economy, Trade and Industry (METI) or Regional Bureaus of Economy, Trade and Industry before shipment. When re-selling or re-exporting the machine, you may need to obtain permissions from METI, and the government of the country where the machine is installed.

- When exporting our machine together with compound rotary table (including case that a rotary table is scheduled to be installed overseas), as a machine conforming to Row 2 of Appended Table 1 of Export Trade Control Order, a relocation detection device is installed on the machine depending on the destination country. After relocating the machine with the detection device, the machine is locked and any operation is temporarily impossible. Please inform your local distributor of machine relocation in advance and apply to perform the release operation of relocated machine.


- In order to operate our machine with an additional axis rotary table installed separately overseas after exporting the machine, the procedure to activate the axis of rotary table is needed. Please inform your local distributor of these processes in advance, because the predetermined procedure is required to perform the activation. In addition, for export to some countries and regions other than "Group A countries", it is not possible to install a compound rotary table separately overseas after exporting the machine. Please make sure to obtain the export license of the machine together with compound rotary table before shipment.

* Depending on the type of coolant, it may have a significant influence on the machine lifecycle. It is recommended to use the coolant which is commercially designated as high lubricity, for example Emulsion type. Especially, the coolant of chemical solution type (ex. Synthetic type) is prohibited to use, because it may cause machine damages.

* When using CTS (Coolant Through Spindle) function, usage of the coolant of combustible type (ex. Oil-based type) is prohibited.

* Windows® is a trademark or registered trademark of Microsoft Corporation in the United States and/or other countries.

External Dimensions

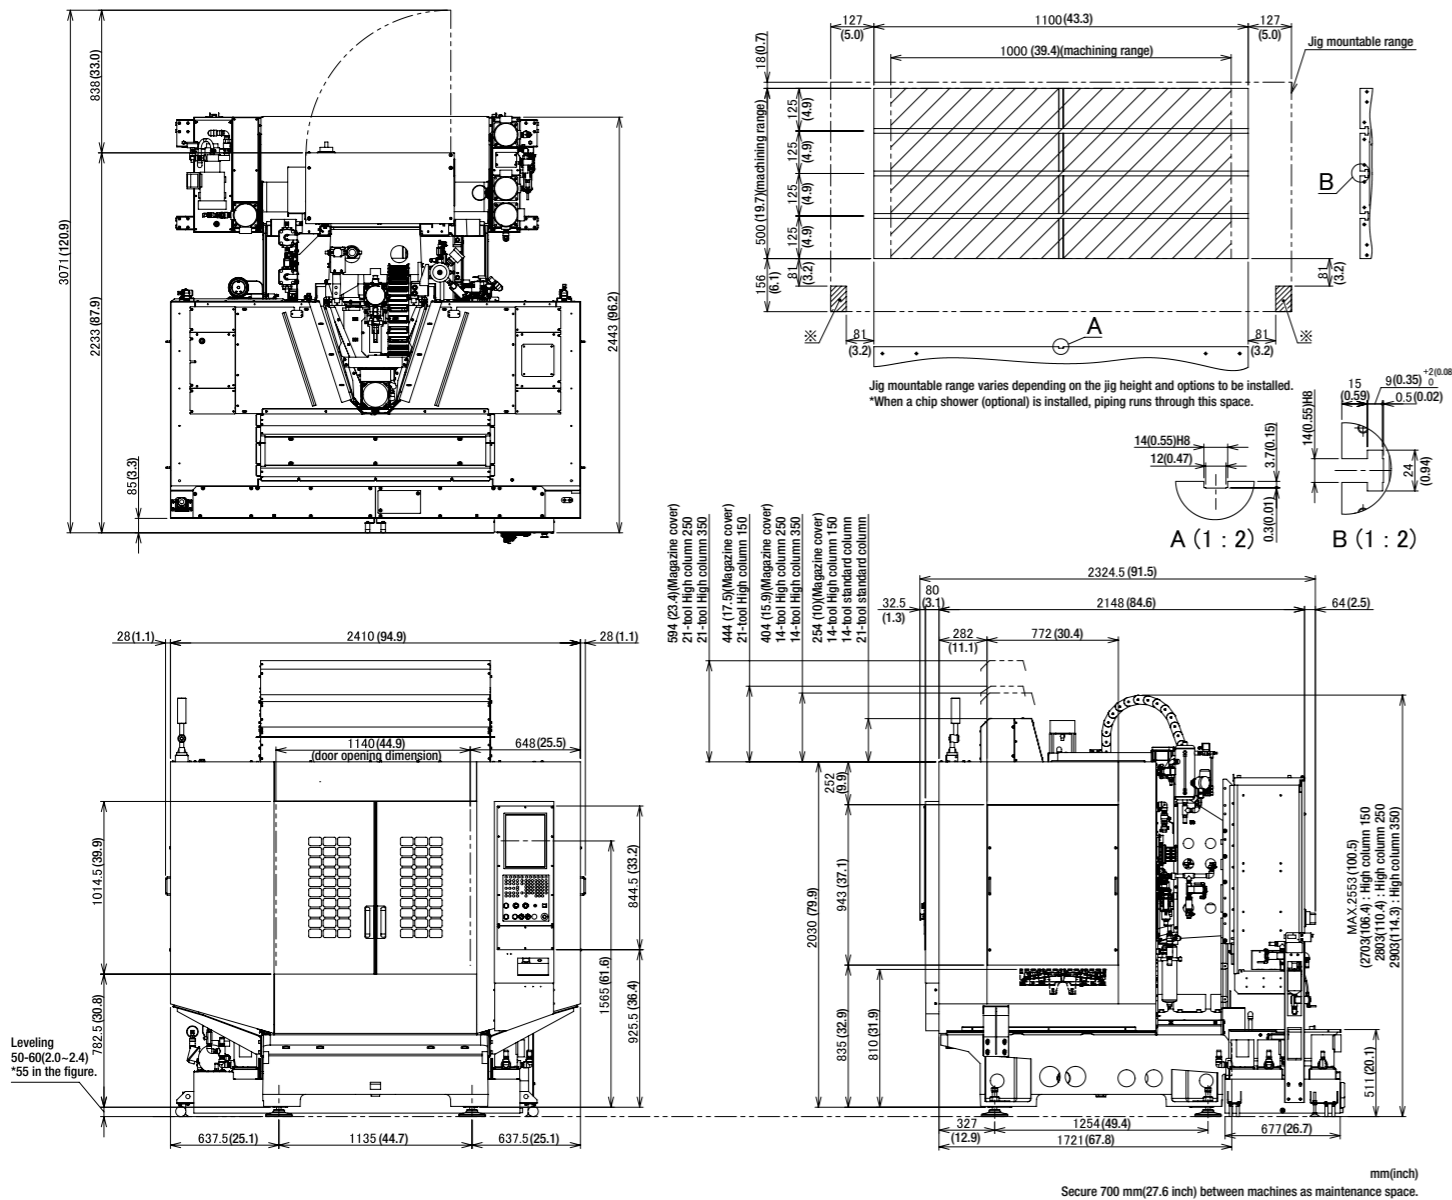

Machine Specifications

Item		W1000Xd1 / W1000Xd1 RD *10	
CNC unit			CNC-D00
Travels	X axis	mm(inch)	1,000 (39.4)
	Y axis	mm(inch)	500 (19.7)
	Z axis	mm(inch)	300 (11.8)
	Distance between table top and spindle nose end	mm(inch)	180-480 (7.1-18.9)
Table	Work area size	mm(inch)	1,100 x 500 (43.3 x 19.7)
	Max. loading capacity (uniform load)	kg(lbs)	300[400 *1] (661[881*1])
Spindle	Spindle speed	min ⁻¹	10,000min ⁻¹ specifications: 1-10,000, 10,000min ⁻¹ high-torque specifications (optional): 1-10,000, 16,000min ⁻¹ specifications (optional): 1-16,000
	Speed during tapping	min ⁻¹	MAX. 6,000
	Tapered hole		7/24 tapered NO.30
	BT dual contact spindle (BIG-PLUS)		Optional
Feed rate	Coolant through spindle (CTS)	MPa	1.5/7.0: Optional
	Rapid traverse rate (XYZ-area)	m/min(inch/min)	50 x 50 x 56 (1,969 x 1,969 x 2,205)
ATC unit	Cutting feed rate	mm/min(inch/min)	X,Y,Z: 1-30,000 (0.04 - 1,181) *2
	Tool shank type		MAS-BT30
	Pull stud type *3		MAS-P30T-2
	Tool storage capacity	pcs.	14 / 21
	Max. tool length	mm(inch)	250 (9.8)
	Max. tool diameter	mm(inch)	ø110 (4.3)
Tool change time *6	Max. tool weight *4	kg(lbs)	3.0(6.6) [4.0(8.8) *5]/tool, (TOTAL TOOL WEIGHT : 25 (55.1) for 14 tools, 35 (77.2) for 21 tools)
	Tool selection method		Random shortcut method
Electric motor	Tool To Tool	sec	0.6
	Chip To Chip	sec	1.2
Power source	Main spindle motor (10min/continuous) *7	kW	10,000min ⁻¹ specifications: 10.1/7.0, 10,000min ⁻¹ high-torque specifications (optional): 12.8/9.2, 16,000min ⁻¹ specifications (optional): 7.4/5.1
	Axis feed motor	kW	X,Y axis: 1.0 Z axis: 2.0
Machining dimensions	Power supply		AC 200 to 230 V±10%, 3-phase, 50/60Hz±2%
	Power capacity (continuous)	kVA	10,000min ⁻¹ specifications: 9.5, 10,000min ⁻¹ high-torque specifications (optional): 10.4, 16,000min ⁻¹ specifications (optional): 9.5
	Air supply	Regular air pressure Required flow	MPa L/min
Accuracy *9	Height	mm(inch)	2,553 (100.5)
	Required floor space *11 [with control unit door open]	mm(inch)	2,410 x 2,233 [3,072] (94.9 x 87.9 [121.0])
	Weight	kg(lbs)	3,350 (7,386)
Front door	Accuracy of bidirectional axis positioning (ISO230-2:1988)	mm(inch)	0.006 ~ 0.020 (0.00024 ~ 0.00079)
	Repeatability of bidirectional axis positioning (ISO230-2:2014)	mm(inch)	Less than 0.004 (0.00016)
Standard accessories	Instruction Manual (DVD 1 set), leveling bolts (4 pcs.), leveling plate (4 pcs.)		2doors

*1 Parameter settings must be changed. (Table travel time will be changed.) *2 When using high accuracy mode B. *3 Brother specifications apply to the pull studs for CTS. *4 Actual tool weight differs depending on the configuration and center of gravity. The figures shown here are for reference only. *5 Parameter settings must be changed. (Tool magazine indexing time will change.) *6 Measured in compliance with JIS B6336-9 and MAS011-1987. *7 Spindle motor output differs depending on the spindle speed. *8 Regular air pressure varies depending on the machine specifications, machining program details, or use of peripheral equipment. Set the pressure higher than the recommended value. *9 Measured in compliance with ISO standards and Brother standards. Please contact your local distributor for details. *10 The machine needs to be equipped with a relocation detection device depending on the destination. Machines equipped with a relocation detection device come with "RD" at the end of the model name. *11 The value does not include the coolant tank.

NC unit specifications

CNC model	CNC-D00
Control axes	5 axes (X,Y,Z, two additional axes)
Simultaneously controlled axes	Positioning 5 axes (X,Y,Z,A,B)
Interpolation	Linear: 4 axes (X,Y,Z one additional axis)
	Circular: 2 axes
	Helical/conical: 3 axes (X,Y,Z)
	Involute interpolation (optional)
Least input increment	0.001mm, 0.0001inch, 0.001 deg.
Max. programmable dimension	±999999.999mm, ±99999.9999inch
Display	15-inch color LCD touch display
Memory capacity	500 Mbytes (Total capacity of program and data bank)
External communication	USB memory interface, Ethernet, RS232C (optional)
No. of registrable programs	4,000 (Total capacity of program and data bank)
Program format	NC language, conversation (changed by parameter), conversation from conversation program to NC language program available

* Number of "control axes" and/or "simultaneously controlled axes" are the maximum number of axes, which will differ depending on the destination country and the machine specifications.
* Ethernet is a trademark or registered trademark of XEROX in the United States.

NC functions

Standard NC functions

Absolute / incremental	Background editing	NC	Menu programming
Inch / metric	Graphic display		Local coordinate system
Coordinate system setting	Screen shot		Expanded workpiece coordinate system
Corner C / Corner R	File viewer		One-way positioning
Rotational transformation	Status log		Inverse time feed
Synchronized tap	Alarm log		Programmable data input
Subprogram	Operation log		Tool length compensation
High-accuracy mode A III	Production performance display		Cutter compensation
High-accuracy mode B I (look-ahead 160blocks)	Computer remote		Scaling
Tool life / Spare tool	Auto notification		Mirror image
Automatic workpiece measurement *1	OPC UA		External sub program call
Dry run	Built-in PLC		Multiple skip function
Machine lock	External input signal key		Macro
Restart	Automatic power off		Operation in tape mode
Rapid traverse override	Servomotor off standby mode		
Cutting feed override	Automatic coolant off		
Tool length measurement	Automatic work light off	Conversation	Operation program
Spindle load monitoring	Chip shower off delay		Schedule program
ATC monitoring	Power consumption display		Automatic tool selection
Adjust machining parameter screen	Motor insulation resistance measurement		Automatic cutting condition setting
Check over load	Tool washing filter with filter clogging detection		Automatic tool length compensation setting
Waveform display / waveform output to memory card	Operation level		Automatic cutter compensation setting
Heat expansion compensation system II (X,Y,Z axes)	Backlash compensation		Automatic calculation of unknown number input
Tap return function			Machining order control

Optional NC functions

Memory expansion 3Gbytes
Spindle override
High accuracy mode BII, look-ahead 1,000 blocks, with smooth path offset
NC Submicron command *2
Interrupt type macro
Rotary fixture offset
Involute interpolation

*1. Measuring instrument needs to be prepared by users.
*2. When the submicron command is used, changing to the conversation program is disabled.
* Functions listed under (NC) and (Conversation) are available only for NC programs and conversation programs respectively.

Brother Technology Center Chicago

BROTHER INTERNATIONAL CORP.
2200 North Stonington Avenue, Suite 270, Hoffman Estates, IL 60169, U.S.A.
PHONE:(1)224-653-8415 FAX:(1)224-653-8821

Brother Technology Center Frankfurt

BROTHER INTERNATIONALE INDUSTRIEMASCHINEN GmbH
Hoechster Str.94, 65835 Liederbach, Germany
PHONE:(49)69-977-6708-0 FAX:(49)69-977-6708-80

Brother Technology Center Bengaluru

BROTHER MACHINERY INDIA PVT LTD.
SB-111-112, 1st Stage, 2nd Cross, Peenya Indl Estate, Bengaluru - 560058 Karnataka, India
PHONE:(91)80-43721645

Brother Technology Center Shanghai

BROTHER MACHINERY (SHANGHAI) LTD.
Unit 01, 5/F., No.799, West Tianshan Rd., ChangNing District Shanghai 200335, China
PHONE:(86)21-2225-6666 FAX:(86)21-2225-6688

Brother Technology Center Chongqing

BROTHER MACHINERY (SHANGHAI) LTD.
Room 30, 31, NO.104 Cuibai Road, Dadukou District, Chongqing Province, 400084, China
PHONE:(86)23-6865-5600 FAX:(86)23-6865-5560

Nanjing Office

BROTHER MACHINERY (SHANGHAI) LTD.
503 Room, Building No.1, No.39, Dongcun Road, Jiangning District, Nanjing City, Jiangsu Province, China
PHONE:(86)25-87185503

Brother Technology Center Queretaro

BROTHER INTERNATIONAL DE MÉXICO, S.A. DE C.V.
Calle 1 No.310 Int 15, Zona Industrial Jurica, Parque Industrial Jurica,
Queretaro, QRO C.P. 76100 México
PHONE:(52)55-8503-8760 FAX:(52)442-483-2667

Brother Technology Center Bangkok

BROTHER COMMERCIAL (THAILAND) LTD.
317 Pattanakarn Road, Pravet Sub-District, Pravet District, Bangkok 10250, Thailand
PHONE:(66)2321-5910 FAX:(66)2321-5913

Gurugram Service Center

BROTHER MACHINERY INDIA PVT LTD.
CE SERVICED OFFICES PVT. LTD., DLF CYBER HUB, Building No 10, Tower A, Level 1,
Phase 3, DLF Cyber City, Gurugram - 122002 Haryana - India
PHONE:(91)80-43721645

Brother Technology Center Dongguan

BROTHER MACHINERY (SHANGHAI) LTD.
Room 103, Building 1, No.2 Nanbo Road,
Songshan Lake District, Dongguan City, Guangdong Province, China
PHONE:(86)769-2238-1505 FAX:(86)769-2238-1506

Brother Technology Center Ningbo

BROTHER MACHINERY (SHANGHAI) LTD.
1F, Building 1, No. 102, Hongtang South Road West Section, Jiangbei District, Ningbo City,
Zhejiang Province, China
PHONE:(86)574-87781232 FAX:(86)574-88139792

Figures in brackets () are the country codes.

Specifications may be subject to change without any notice.

BROTHER INDUSTRIES, LTD.

Machinery Business Division

1-5, Kitajizoyama, Noda-cho, Kariya-shi, Aichi-ken 448-0803, Japan
<https://www.brother.co.jp>

