



**Matsuura**

URL : <http://www.matsuura.co.jp/>

E-MAIL : [webmaster@matsuura.co.jp](mailto:webmaster@matsuura.co.jp)

**MATSUURA MACHINERY CORPORATION**

1-1 Urushihara-cho Fukui City 910-8530, Japan  
TEL : +81-776-56-8106 FAX : +81-776-56-8151

**MATSUURA EUROPE GmbH**

Berta-Cramer-Ring 21  
D-65205 Wiesbaden-Delkenheim, Germany  
TEL : +49-6122-7803-80 FAX : +49-6122-7803-33  
URL : <http://www.matsuura.de/>  
E-MAIL : [info@matsuura.de](mailto:info@matsuura.de)

**MATSUURA MACHINERY Ltd.**

Gee Road, Whitwick Business Park, Coalville Leicestershire, LE67 4NH, England  
TEL : +44-1530-511-400 FAX : +44-1530-511-440  
URL : <http://www.matsuura.co.uk/>  
E-MAIL : [sales@matsuura.co.uk](mailto:sales@matsuura.co.uk)  
Facebook : [www.facebook.com/pages/Matsuura-Machinery-Ltd/427006380682983](https://www.facebook.com/pages/Matsuura-Machinery-Ltd/427006380682983)

**MATSUURA MACHINERY GmbH**

Berta-Cramer-Ring 21  
D-65205 Wiesbaden-Delkenheim, Germany  
TEL : +49-6122-7803-0 FAX : +49-6122-7803-33  
URL : <http://www.matsuura.de/>  
E-MAIL : [info@matsuura.de](mailto:info@matsuura.de)

**ELLIOTT MATSUURA CANADA INC.**

2120 Buckingham Road Oakville Ontario L6H 5X2, Canada  
TEL : +1-905-829-2211 FAX : +1-905-829-5600  
URL : <http://www.elliottmachinery.com/>  
E-MAIL : [sales@elliottmachinery.com](mailto:sales@elliottmachinery.com)

**MATSUURA MACHINERY USA INC.**

325 Randolph Ave., St.Paul, MN 55102, U.S.A.  
TEL : +1-651-289-9700  
URL : <http://www.matsuurausa.com/>  
E-MAIL : [info@matsuurausa.com](mailto:info@matsuurausa.com)

- Product specifications and dimensions are subject to change without prior notice.
- The photos may show optional accessories.



This product is subject to all applicable export control laws and regulations



FM-E1.1 201611 1000 B S

 **Matsuura**

5-Axis Multi-Tasking Machining Center

# CUBLEX-35



**MAXIA**  
Innovation by  Matsuura



# Matsuura **CUBLEX-35**

Advanced, high precision multi-tasking for sustained unmanned production

## **CUBLEX**; The Ultimate Platform for Process Integration

Milling, turning and grinding on one state of the art machine tool, offering more versatile unmanned production from a compact footprint. Set-up time and accumulated errors between different operations are eliminated. Higher accuracy, more production, reduced manpower costs & faster times to market are all realised by investors in the Matsuura **CUBLEX-35**.

### Milling + turning + grinding\* incorporated in one machine

In addition to 5-axis milling capabilities, turning and grinding\* functions are incorporated in one machine. This "Ultimate Process Integrating Machine" is developed based on an innovative idea greatly differing from lathe-based turning centers. \* Option

### Extended unmanned running with single chucking operation

Based on the market leading **MAM72-35V** multi pallet 5 axis, the **CUBLEX-35** takes this globally renowned & respected format to new heights of productive excellence, with one chucking turning & grinding added to the unrivalled 5 axis performance of Matsuura. As with the **MAM72-35V**, reliable, profitable & sustained unmanned performance is assured.

### Irregular-shaped, rectangular and thin workpieces supported

Irregular component shapes and those possessing thin walled characteristics are effortlessly accommodated by the **CUBLEX-35**, as are difficult to chuck rectangular shaped components.



See page 11 for conditions on the maximum part size.



320-tool magazine + PC2 specification



Machining

Multi-Tasking

Turning

Grinding



# Milling + Turning + Grinding\* Incorporated in One Machine

\* Option





# C-axis Drive with a DD Motor High-speed Chuck Rotation at 3,000 min<sup>-1</sup> Available with Turning and Grinding




Extraordinary process integration achieves cycle time reduction and cost effective high-precision production.

No setup or alignment between processes is required. One-chucking operation eliminates errors accumulated from setups and enables high-precision machining in unmanned operation for extended durations.

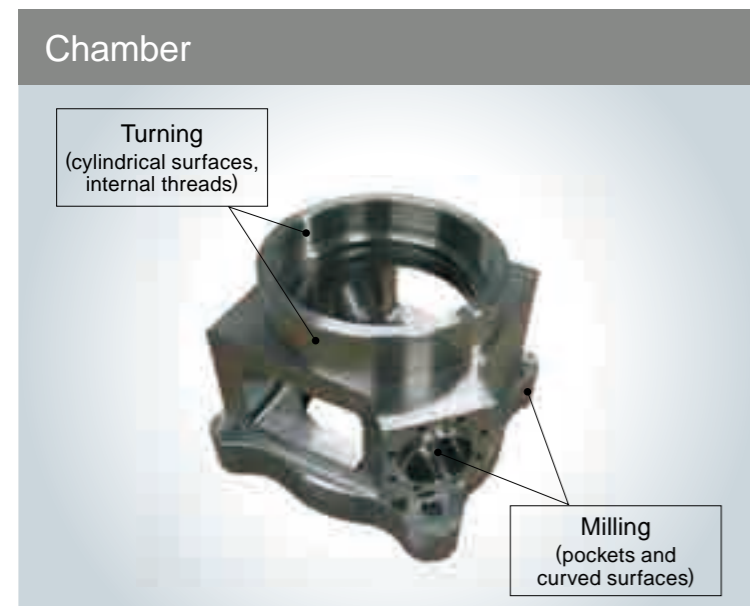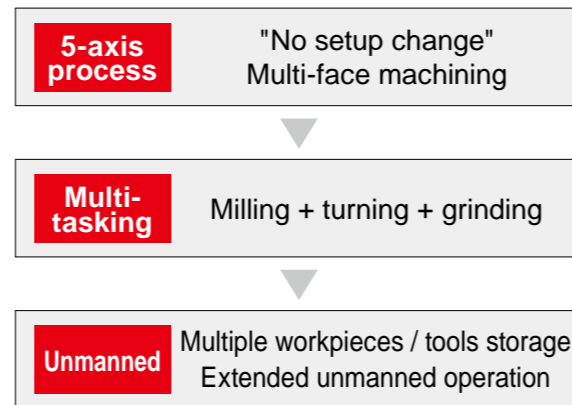



Conventional (lathe + 5-axis MC)	
<b>2+2 = 4Process</b>	
<b>CUBLEX-35</b>	
<b>2Process (50% reduction)</b>	
Tools used	6 tools (turning) + 11 tools (milling)
Material	CENA1 (HRC40)

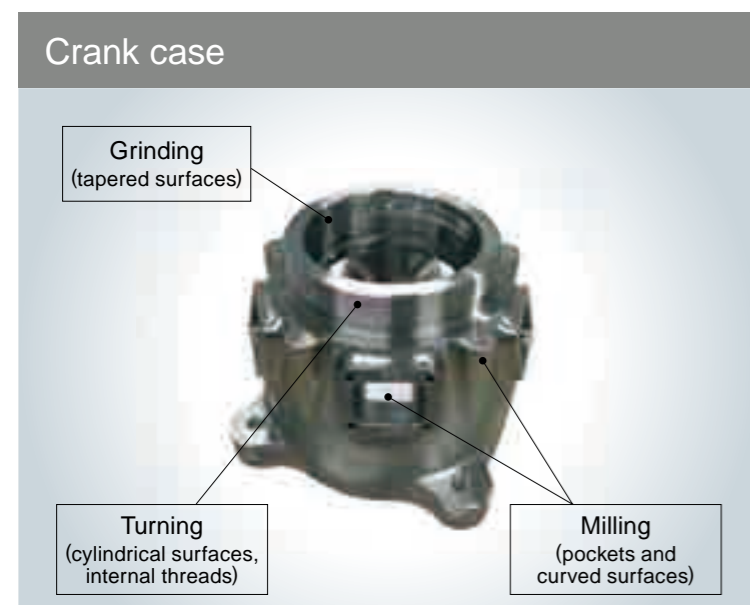

Conventional (lathe + 5-axis MC)	
<b>2+2 = 4Process</b>	
<b>CUBLEX-35</b>	
<b>2Process (50% reduction)</b>	
Tools used	6 tools (turning) + 12 tools (milling) + 1 tool (grinding)
Material	CENA1 (HRC40)

## Turning spindle


High speed, high accuracy C-Axis positioning in Milling mode (maximum spindle speed is 200 min<sup>-1</sup>) and high speed chuck rotation in turning mode (3,000 min<sup>-1</sup>) – the highest speeds in their class, on one machine tool platform. A dedicated oil cooler is integrated into the machine as a standard feature, assuring accuracy, repeatability & reliability.

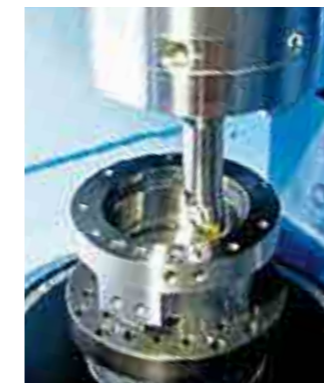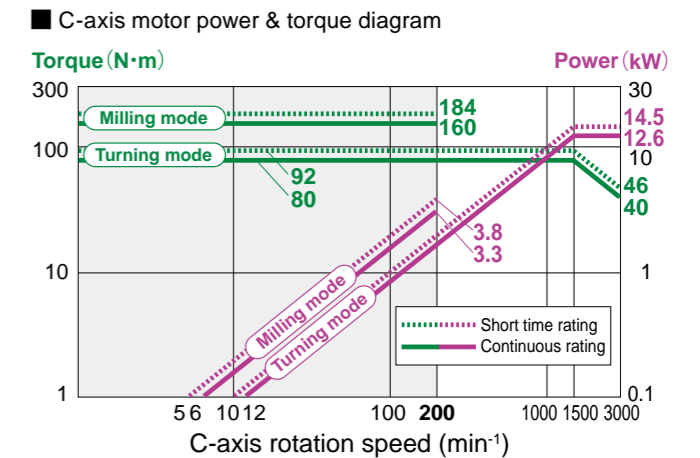

Vertical turning



Horizontal turning

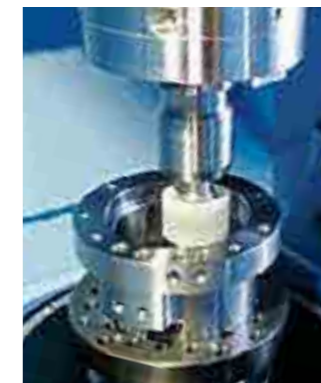

Internal grinding



End face grinding

## Matsuura OEM “Imbalance Check Function” – stability assured during turning / grinding operations

### Imbalance check function

Ensuring perfect balance in relation to a components rotation centre is effortless with Imbalance Check Function” – developed by Matsuura especially for **CUBLEX** Series machines. As well as perfect balance, this superb function will also inform the operator of the safest rotational speed that can be utilised with any given component.



### [Flying prevention function]

This function monitors the extent of imbalance during turning, and if exceeding the set level, stops the machine to avoid damaging the components.

### [Imbalance check function]


The extent of imbalance is measured and the correction information (balance weight / balancing position) is transmitted for feedback.

# Tooling System for Multi-Tasking Machines

# MAXIA Spindle for High-speed High-precision 5-axis Machining

## HSK ICTM standard

ICTM is based on the HSK standard for multi-tasking machining centres. ICTM / HSK is included & recognised in both JIS & ISO Standards. Reduced clearance between the spindle drive key & the tool holder keyway ensures sustained turning accuracy, and two face clamping assures high rigidity against the cutting force generated during turning.

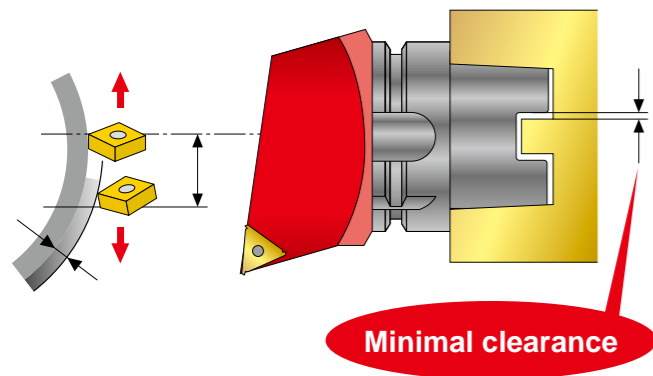

## Multi-faceted tooling

Multi-faceted tooling is usable since the spindle can be locked at any phase position. For example, when using a triple insert cutter, the spindle can be locked at 120-degree increments, enabling three kinds of turning operation within one operation setup. In addition, the amount of tool offset can be configured for each insert on the tool management screen. This reduces tool change times and the need for extra tool holders.



## Proven spindle lock mechanism

The Matsuura Spindle possesses an integrated and robust drum brake mechanism. This proven spindle lock system contributes greatly to sustainable high accuracy turning.



## Proven MAXIA spindle

MAXIA spindles are renowned worldwide for precision, rigidity & low noise. High-speed high-precision machining is available with a vast spectrum of materials from aluminum to hard-to-cut materials.

## Spindle lubrication with grease


Grease spindle lubrication system is employed for environmental protection and labor saving.

## Spindle nose diameter reduced by 20 mm from existing models


The collision area during simultaneous 5-axis machining is reduced, enabling greater freedom in machining operation.

## Spindle motor power & torque diagram


12,000min<sup>-1</sup> (7.5 / 11 kW(Continuous / 30 min)) **Standard**

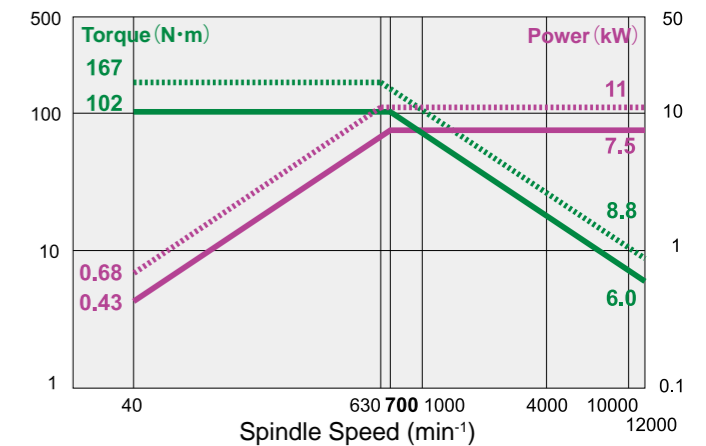

15,000min<sup>-1</sup> (Low : 7.5 / 11 kW, High : 11 / 15 kW) **Option**

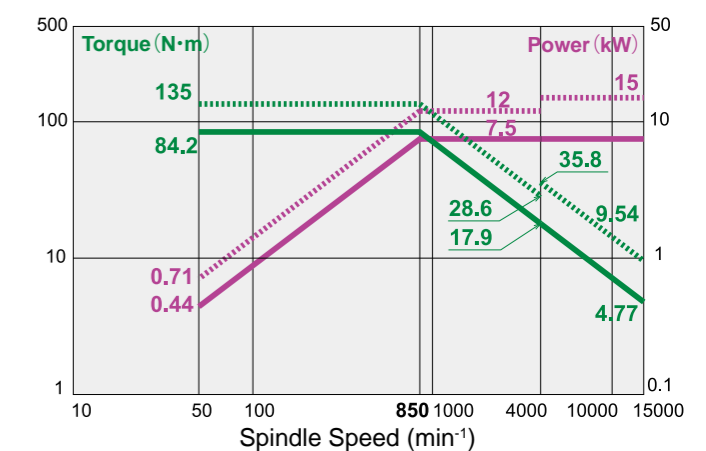

20,000min<sup>-1</sup> (Low : 11 / 15 kW, High : 15 / 18.5 kW) **Option**

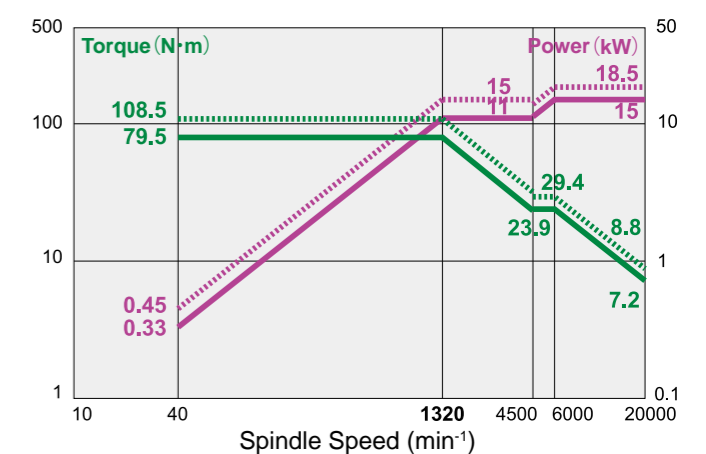



# Capabilities in Milling, Turning or Grinding Mode Comparable to Single-purpose Machines

# Automation of High-accuracy Workpiece Measurement, Wheel Dressing and Grinding

## Test results (milling mode)

	Part material	Tool size	Cutting width Cutting depth	Spindle speed	Cutting feed rate	Cutting capacity
 Face mill	A5052	φ80mm	W=70mm D=4mm	5,500min <sup>-1</sup>	4,500mm/min	1,260cc/min
	S45C	φ80mm	W=70mm D=3mm	900min <sup>-1</sup>	1,800mm/min	378cc/min
 Endmill	A5052	φ25mm	W=22mm D=6mm	12,000min <sup>-1</sup>	7,000mm/min	924cc/min
	S45C	φ25mm	W=3mm D=30mm	5,000min <sup>-1</sup>	3,500mm/min	315cc/min

\* Tested with standard spindle (12,000 min<sup>-1</sup>) \* Actual measured data; these are not guaranteed values.

## Test results (turning mode)

	Part material	Outer dia.	Cutting depth (dia.)	Rotation speed	Feed rate (per rotation)	Cutting capacity
 Vertical turning	A5057	φ243mm	6mm	800min <sup>-1</sup>	0.4mm	732cc/min
		φ113mm	5mm	3,000min <sup>-1</sup>	0.5mm	1,330cc/min
 Horizontal turning	S45C	φ348mm	3mm	180min <sup>-1</sup>	0.18mm	53.1cc/min
		φ118mm	6mm	800min <sup>-1</sup>	0.3mm	267cc/min

\* No difference between the turning methods (vertical or horizontal) \* Actual measured data; these are not guaranteed values.

## Test results (grinding mode)

Part material	Cylindrical grinding			Surface grinding	
	Out of roundness	Cylindricity	Surface roughness	Flatness	Surface roughness
SCM420 (heat-treated HRC60)	0.3μm	0.7μm	0.13μm	0.5μm	0.09μm
SCM435 (hardened HRC23)	0.3μm	0.4μm	0.1μm	1.07μm	0.14μm



Part size: D120 x 110mm Grinding wheel size: D75 x 35mm \* Actual measured data; these are not guaranteed values.

All processes from workpiece diameter measurement, wheel radius measurement, wheel dressing and grinding, to workpiece diameter measurement after grinding can be automated.

### Grinding function

Option

Grinding is performed by rotating the grinding wheel mounted on the spindle and the workpiece on the C axis at the same time.

### Packaged options

Option

Options required for grinding, such as linear guides and spindle outer nozzles, are packaged. Choose either basic type A or type B with high-pressure coolant through spindle.



Grinding function	Y-axis linear guide dustproof cover	Spindle outer nozzle	Chopping (G81.1)	FP-70 (High-pressure coolant through spindle 7 MPa + oil cooler + 5μm filter)	Grinding screen, cutting macro program, automatic measurement (optical) MP-700, tool breakage (laser), dresser, wheel cleaning air blow (either automatic measurement (optical) MP700 or tool breakage (laser) unit must be selected)
Type A	○	○	○	—	—
Type B	○	○	○	○	—
Type A + automation	○	○	○	—	○
Type B + automation	○	○	○	○	○



Dresser



Tool breakage (laser)




Automatic measurement (MP-700)

### Grinding automation function

Option

A diamond dresser and MP-700 touch probe for high-speed high-accuracy automatic workpiece position / size measurement are provided. The entire processes starting from workpiece measurement, wheel dressing, grinding and workpiece post-measurement to re-grinding can be executed automatically.

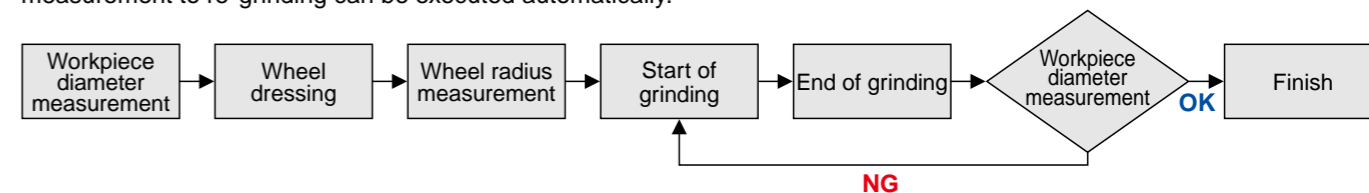

# Options – From Prototype & One off Pieces to Vast Production Runs

Pallet changer "PC2" and 60-tool chain magazine are standard machine features. Optional APC or ATC systems maximize the possibilities of long-span unmanned operation.


## Optional Matrix magazine – upto 520 tools

The standard chain magazine holds 60 tools. An optional matrix magazine can be selected with a tool holding capacity from 120 tools up to a maximum of 520 tools in increments of 40 tools.



60-tool chain magazine

Maximum tool diameter	mm	80 (with adjacent tools) 150 (without adjacent tools)
Maximum tool length	mm	350
Maximum tool length	kg	10

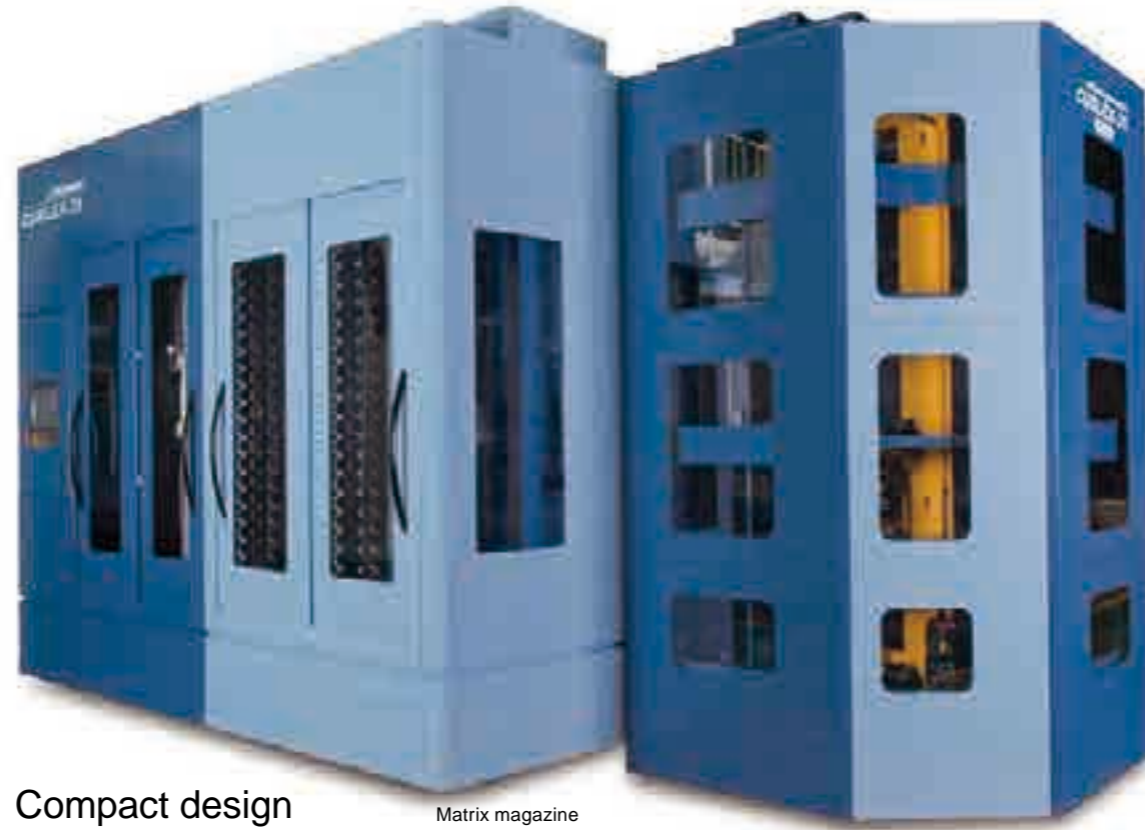

## Compact design

Integrated pallet stoker and conveyor system designed to minimize the required floor space

Matrix magazine

## Tower pallet system expandable up to PC40

Whatever your present or future production requirements, there is a configuration of **CUBLEX-35** that will help your business grow & adapt to new projects & customers.


\* Contact your Matsuura agent for a bespoke assessment of your production.

\* With PC32 and PC40, workpieces up to 315 mm high can be stored in the top level of the tower pallet.


Pallet	PC32				PC40			
	Rack 1	Rack 2	Rack 3	Rack 4	Rack 1	Rack 2	Rack 3	Rack 4
	15	10	7		15	15	7	3
Part size	D350 H300 mm				D350 H300 mm	D300 H300 mm	D350 H300 mm	
	60kg				60kg			

## Stroke diagram

■ B-axis 0-deg. position  
Unit : mm (in.)

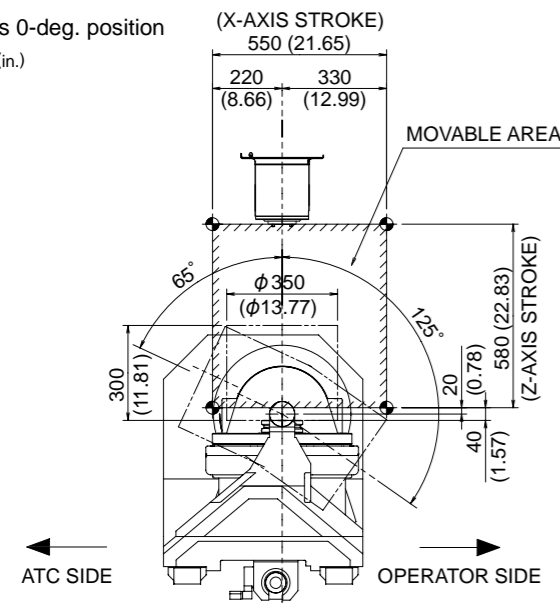

■ B-axis minus 90-deg. position  
Unit : mm (in.)

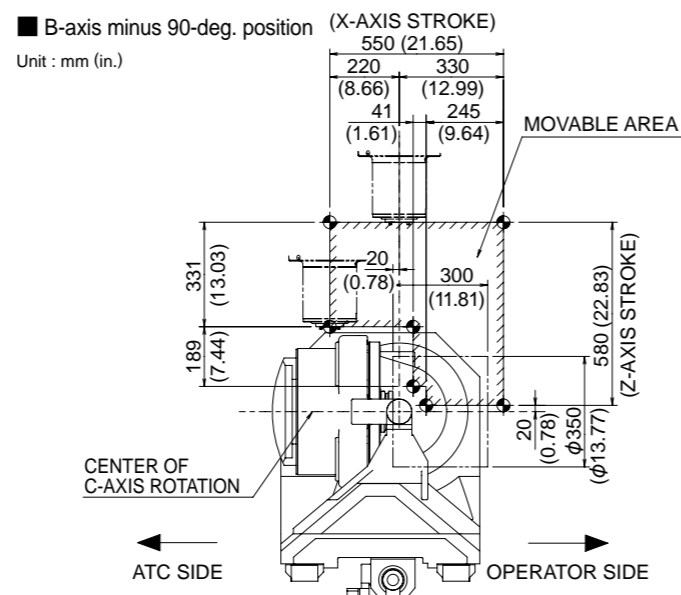


## Compact & high precision Versatile CAPTO system employed

The CAPTO system with high-precision positioning and repeatability is employed for the pallet system. Commercially available fixtures are well supported.



■ Pallet top view Unit : mm (in.)

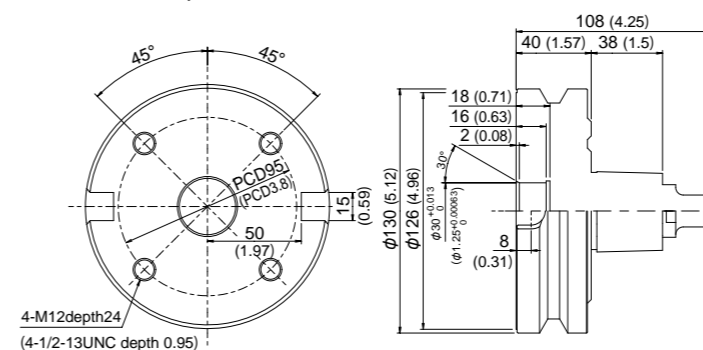

## Chip disposal system for extended unmanned operation

Chip flush coolant and a spiral chip conveyor are provided as standard features. A lift-up conveyor is available as an option.

## Tailstock

Option

A tailstock is available for long workpieces. This can be used at a C-axis speed of 3,000 min<sup>-1</sup>.





# Ergonomic Design for Maximum Ease of Operation



## Accessibility to workpiece and spindle

Excellent access – 450mm from the operator position to the pallet centre & 280mm to the spindle centre. Door opening width is a colossal 630mm – further improving access & operator comfort.



## Easy-to-read, easy-to-recognize large screen touch panel

The machine is equipped with a new operating system that features a 15-inch touch panel. Icons required for operation, setup and maintenance are displayed on screen. Screen display can be switched by single-tapping, and can be customized as needed.



## GibbsCAM

**GibbsCAM** is a field-oriented solid CAM system which is easy to use and learn. A **CUBLEX**-series dedicated module and post processor are available. Rendering simulation in part mode ensures collision free programming.



## 5-axis error probing and correction **eZ-5** Option

eZ-5 utilizes a touch probe and correction ball to measure errors and correct the center coordinates of the tilting/rotating axes. Geometrical errors in 5-axis machining can be tuned easily in the field.



# MIMS Matsuura Intelligent Meister System

## Collection of technical expertise and special skills

Matsuura's unique interface to maximize rapid operation and usability

Environment	<b>Eco Meister</b>	Power saving	Accuracy	<b>Thermal Meister</b>	Thermal Meister
	<ul style="list-style-type: none"> <li>Power cut-off function</li> <li>Energy-saving devices installed</li> </ul>	<ul style="list-style-type: none"> <li>Spindle thermal displacement compensation</li> <li>X/Y/Z thermal displacement compensation</li> <li>Environmental thermal displacement compensation</li> </ul>			
Simple	<b>Operability Meister</b>	Fuss-free simple operation	Secure	<b>Reliability Meister</b>	Machine downtime reduction
	<ul style="list-style-type: none"> <li>Tool setup support</li> <li>Workpiece setup support</li> </ul>	<ul style="list-style-type: none"> <li>Preventive maintenance support functions</li> <li>Machine restoration support functions</li> </ul>			
				<b>Reliability Meister Plus</b> Option	Increased security provided
				<ul style="list-style-type: none"> <li>Electronic manual</li> <li>E-mailing function</li> </ul>	

## Intelligent Protection System **Standard**


### Ultra Safe Collision Protection

The Intelligent Protection System is Matsuura's original collision prevention system, which reliably prevents collisions during automatic or manual operation or setup that may occur due to programming errors or mistakes.



\* This shows a concept image.

### On-line link with PC

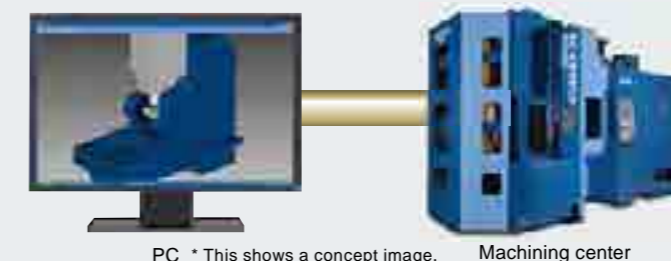

PC \* This shows a concept image. Machining center

\* **Intelligent Protection System** System simulates your programmed components (tools, workpiece, fixtures, etc.) that match the machine model, alerting you to any possible interference or collision before actual machining takes place.  
\* Prepare a PC on your side. Contact Matsuura for PC requirements.

# Standard Machine Specifications

■ Movement and Range		
X-axis travel	mm (in.)	550 (21.65)
Y-axis travel	mm (in.)	440 (17.32)
Z-axis travel	mm (in.)	580 (22.83)
B-axis rotation angle	deg	+65 ~ -125
C-axis rotation angle	deg	360
■ Pallet		
Working surface	mm (in.)	φ 130 (φ 5.11)
Loading capacity	kg (lb.)	60 (132)
Max. workpiece size	mm (in.)	φ 350 × H 315 (φ 13.77 × H 12.40)
■ Spindle		
Spindle speed	min <sup>-1</sup>	40 - 12000 (grease lubrication)
Spindle speed change command		S5 digits direct command
Type of spindle taper		HSK-A63W (ICTM)
Spindle bearing inner diameter	mm (in.)	φ 80 (φ 3.14)
Spindle motor output	kW	AC 7.5 / 11 (cont. / 30 min.)
Max. spindle torque	N·m	167 / 630min <sup>-1</sup>
■ Feed Rate		
Rapid traverse rate X / Y / Z	mm/min	60000 / 60000 / 60000
B	min <sup>-1</sup>	50
C	min <sup>-1</sup>	200 / 3000 (Milling mode/turning mode)
■ Automatic Tool Changer		
Type of tool shank		HSK-A63W (ICTM)
Tool storage capacity	pcs.	60 (chain type)
Max. tool diameter	mm (in.)	80 (φ 3.14) (with adjacent tools) 150 (φ 5.90) (without adjacent tools) Storage locations are restricted.
Max. tool length	mm (in.)	350 (13.77)
Max. tool mass	kg (lb.)	10 (22)
Tool change time	sec	1.1 (Tool-to-tool) 7.9 (Chip-to-chip)

■ Automatic Pallet Changer		
Number of pallets		2
■ Power Sources		
Electrical power supply	KVA	80 (Depends on the optional features)
Power supply voltage	V	AC 200 / 220 ± 10% Transformer required for the voltage except above
Power supply frequency	Hz	50 / 60 ± 1
Air volume to be supplied (maximum flow volume)	NL	600min <sup>-1</sup>
■ Tank Capacity		
Hydraulic oil tank	L	40
Coolant tank	L	400
Oil cooler tank	L	10 (total capacity: 15 L)
■ NC System		
Control system		<b>Matsura G-Tech 31i</b>
■ Standard Accessories		
01. Total splash guard	02. ATC auto door	
03. Synchronized tapping function	04. <b>AD-TAP</b> function	
05. <b>IPC</b> function	06. Imbalance check function	
07. Oil cooler	08. Auto grease supply unit for feed axes	
09. Hydraulic oil cooler	10. Coolant unit	
11. Chip-flush coolant	12. Spiral chip conveyor	
13. Spindle overload protection	14. M-code counter (9 kinds)	
15. Work light	16. Standard mechanical tools & tool box	
17. Machine color paint	18. Scale feedback B-/C-axis	
19. C-axis spindle cleaner	20. <b>Intelligent Protection System</b>	
21. Leveling pads & bolts		
22. <b>MIMS</b> (Matsura Intelligent Meister System)		

\* 2 years spindle warranty


# Optional Equipment

○ : Standard ▲ : Option

■ Attachment List		
12,000min <sup>-1</sup> (HSK-A63W, grease lubrication)		○
15,000min <sup>-1</sup> (HSK-A63W, auto grease lubrication)		○
Spindle motor output	kW	Low : 7.5 / 12, High : 7.5 / 15
Max. spindle torque	N·m	135
20,000min <sup>-1</sup> (HSK-A63W, auto grease lubrication)		▲
Spindle motor output	kW	Low : 11 / 15, High : 15 / 18.5
Max. spindle torque	N·m	108.4
■ ATC		
60 tools (chain magazine)		○
120 / 160 / 200 / 240 / 280 / 320 tools (matrix magazine 320-tool base)		▲
360 / 400 / 440 / 480 / 520 tools (matrix magazine 520-tool base)		▲
■ High Accuracy Control		
Scale feedback X-/Y-/Z-axis (Heidenhain)		▲
■ APC		
PC2		○
PC32 (Tower pallet system)		▲
PC40 (Tower pallet system)		▲
■ Coolant		
Coolant tank unit		○
Vacuum type coolant through spindle A 70BAR		▲
Vacuum type coolant through spindle A 140BAR		▲
Vacuum type coolant through spindle B 70BAR		▲
Vacuum type coolant through spindle B 140BAR		▲
Vacuum type coolant through spindle C 20BAR		▲
Vacuum type coolant through spindle C 70BAR		▲
Coolant flow checker		▲
Mist separator (without fire damper)		▲
Mist separator (with fire damper)		▲
Coolant temperature controller with 100-liter tank (separately installed, small size)		▲
Coolant temperature controller with 200-liter tank (separately installed, large size)		▲
■ Automatic Measurement, Tool Breakage Detection		
Automatic measurement / automatic alignment (optical)		▲
Tool breakage / full automatic tool length measurement (contact)		▲
Tool breakage / full automatic tool length measurement (laser)		▲
Tool breakage / full automatic tool length measurement (hybrid)		▲
Automatic measurement (optical) & tool breakage (contact)		▲
Automatic measurement (optical) & tool breakage (laser)		▲
Automatic measurement (optical) & tool breakage (hybrid)		▲
Automatic measurement (MP-700) & tool breakage (laser)		▲
External tool breakage (60-tool chain magazine, contact)		▲
External tool breakage (matrix magazine, contact)		▲
■ Safety Devices		
Matsura safety specification		○
Automatic fire extinguisher		▲
■ Reliability Meister Plus		
Reliability Meister Plus TYPE A		▲
Reliability Meister Plus TYPE B		▲

■ Chip Removal		
Total splash guard		○
ATC auto door		○
Spiral chip conveyor		○
Lift-up conveyor (hinge + scraper, drum)		▲
Air blow for chip removal		▲
Chip bucket		▲
Part washing gun (on the machine side)		▲
Part washing gun (on the APC side)		▲
20-bar external nozzle (with coolant through spindle)		▲
70-bar external nozzle (with coolant through spindle)		▲
■ Operation/Maintenance Support		
<b>AD-TAP</b> function		○
<b>IPC</b> function		○
Work light		○
■ MIMS		
<b>Intelligent Protection System</b>		○
Auto grease supply unit for feed axes		○
Additional eight M functions		▲
Spindle load monitoring function		▲
Weekly timer		▲
3-color signal light (red, yellow, green from top)		▲
Removable manual pulse generator		▲
Optional block skip addition 2 to 9		▲
Pre-machining tool check function		▲
Rotary wiper (air driven)		▲
Rotary wiper (electrically driven)		▲
Semi-dry unit		▲
100 VAC socket		▲
eZ-5 (with calibration ball)		▲
eZ-5 (without calibration ball)		▲
Pressure supply system for fixtures		▲
■ Machining Support		
Tailstock		▲
Tool ID system (Balluff, format A)		▲
Tool ID system (Balluff, format B)		▲
Tool ID system (Balluff, format C)		▲
Tool ID system		▲
■ Optional Package		
High-speed high-accuracy package		▲
5th-axis package		▲
High-speed high-accuracy & 5th-axis package		▲
Value package		▲
<b>TRUE PATH</b>		▲
Machine module		▲
Grinding function A		▲
Grinding function B (+ 70-bar coolant system)		▲
Grinding function A + automation		▲
Grinding function B (+ 70-bar coolant system) + automation		▲

**PC2** External View, Floor Plan Unit : mm (in.)

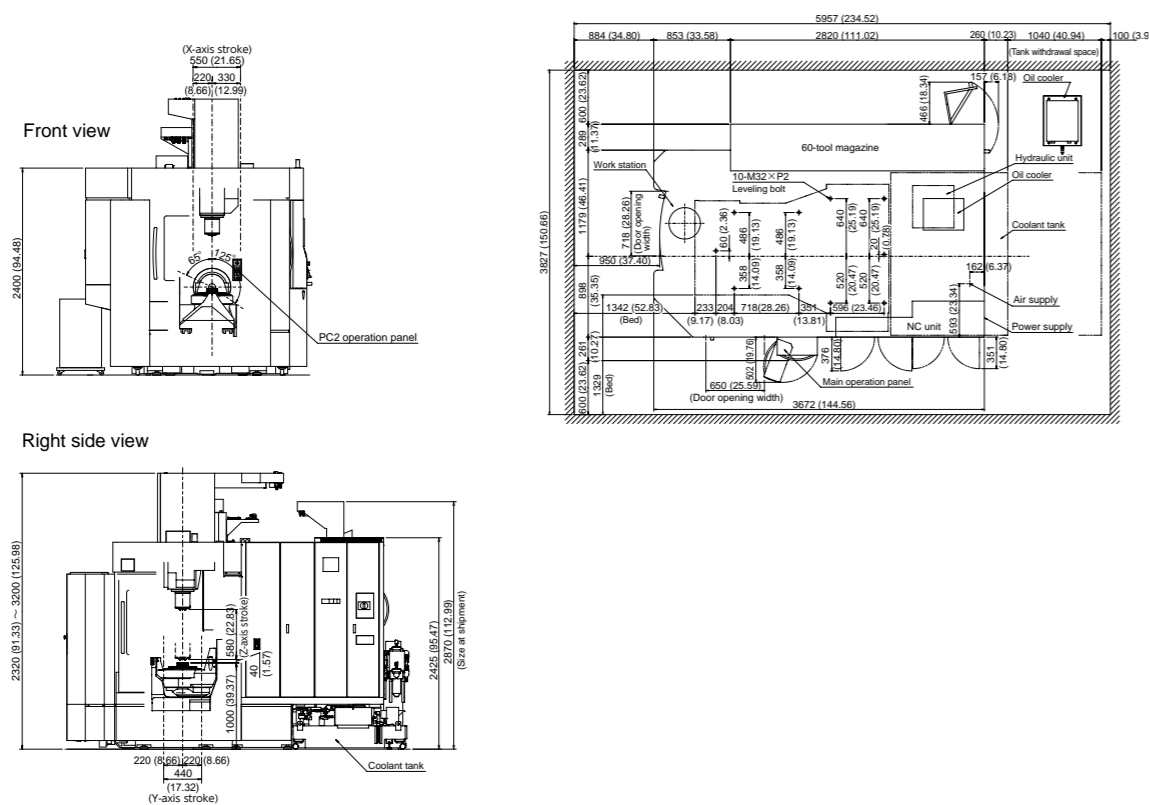

**PC32** External View, Floor Plan Unit : mm (in.)

